

505D



Double passage gate



Features

- Single central structure with 2 independent gate operators.
- Stainless steel construction.
- Side pass indicators.
- Motor driven gates 180° (90° + 90°) operation.
- Activated by dry contact or via TTL input 5-48v.
- Can be activated by most access control units and token systems.

Options

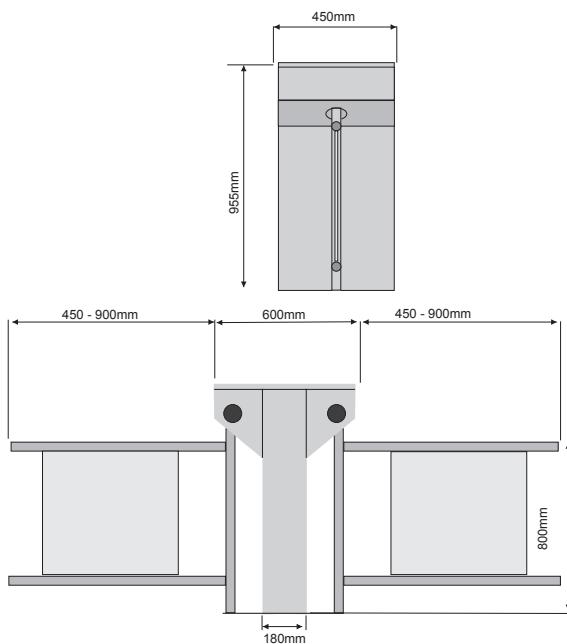

Specification

- Dimensions:** 450 x 1015 x 600 + Arm length (2 x 450-900mm).
- Weight:** 62kg.
- Body:** 1.5 mm (304) Stainless Steel or powder coated sheet metal. Both alternatives are protected against water for external use.
- Arms:** Ø 40 x 2.5mm wing flaps can be dismantled. (304) Stainless Steel.
- Power:** 220 v. 50 Hz. Standby ~16W. Max. ~130W.
- Temperature:** -10°C/+45°C (Opt. -50°C with heater unit).