


# 705E



## Passage gate

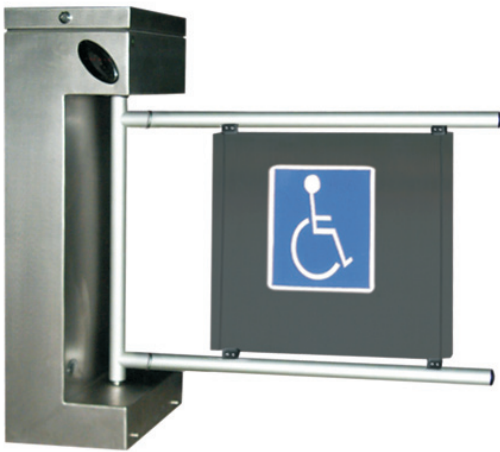

### Features

- Stainless steel construction.
- Side pass indicators.
- Motor driven gates 180° (90° + 90°) operation.
- Activated by dry contact or via TTL input 5-48v.
- Can be activated by most access control units and token systems.

### Options

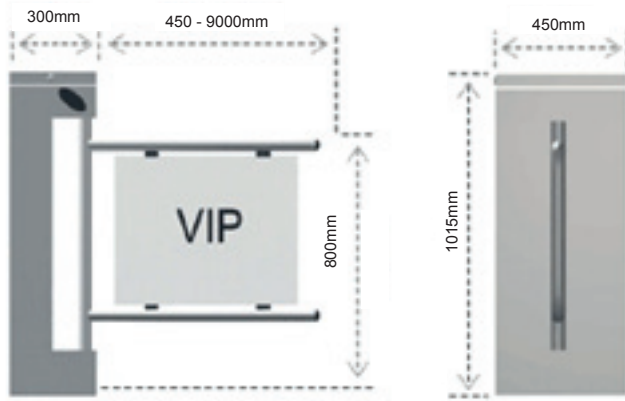

### Specification

- Dimensions:** 450 x 1015 x 300 + Arm Length (450-900mm).
- Weight:** 39kg.
- Body:** 2 mm (304) Stainless Steel or Powder Coated Sheet Metal. Both alternatives are protected against water for external use.
- Arms:** Ø 40 x 2.5mm wing flap can be dismantled. 2 anodised mat aluminium bars at the wing. (Opt. Stainless Steel).
- Power:** 220 v. 50 Hz. Standby ~8 W. Max. ~65W.
- Temperature:** -10°C/+45°C (Opt. -50°C with heater unit).